


ANGLE REFLECTOR WALL SCONCE



The RLM Series provides building facade and signage illumination with maximum versatility. Various mounting, lamp sources, and color options make this series an attractive addition to any building design.

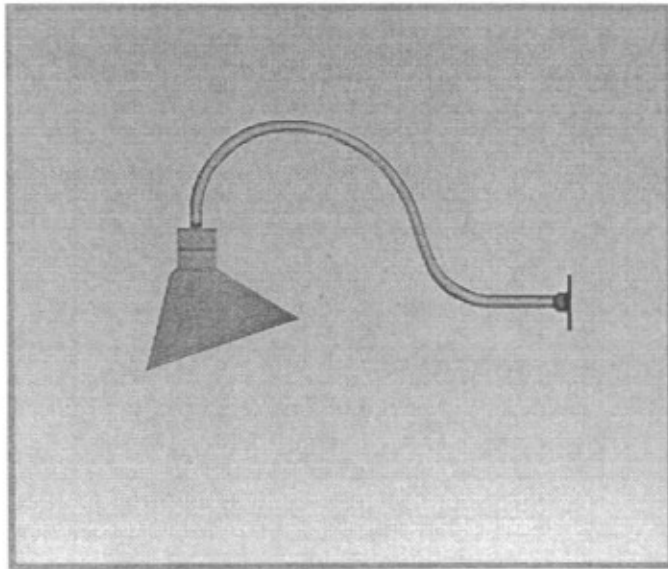


Fixture Specifications

FEATURES

- Spun aluminum reflector
- Suitable for use in wet location
- Shipped with lamp (except incandescent)

DIMENSIONS

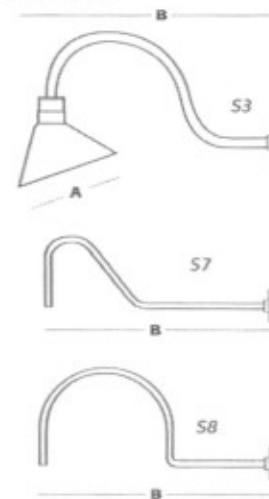

ORDERING INFORMATION

SAMPLE CATALOG NUMBER

RLM **XXXXX** **XX** **SX** **XX** **XX**

Series Wattage/Source Finish Arm option Ballast Voltage

SERIES

RLM Angle Reflector Wall Sconce

WATTAGE/SOURCE¹

100MH 100 watt metal halide

175MH 175 watt metal halide

INC Incandescent, med. base, 200 watt max.

FINISH²

SA Satin aluminum

WH White

ARM OPTIONS

S3 S3 Arm

S7 S7 Arm

S8 S8 Arm

BALLAST

RB Remote ballast

RW Remote weather-proof ballast

00 Incandescent

VOLTAGE

12 120V

27 277V

¹ Consult factory for other lamp wattages and sources.
² Consult factory for other available finishes.

A	B
12.0"	24.75" (S3)
	28.0" (S7)
	29.75" (S8)




A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

www.securitylighting.com

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642

TRAPEZOIDAL WALL SCONCE

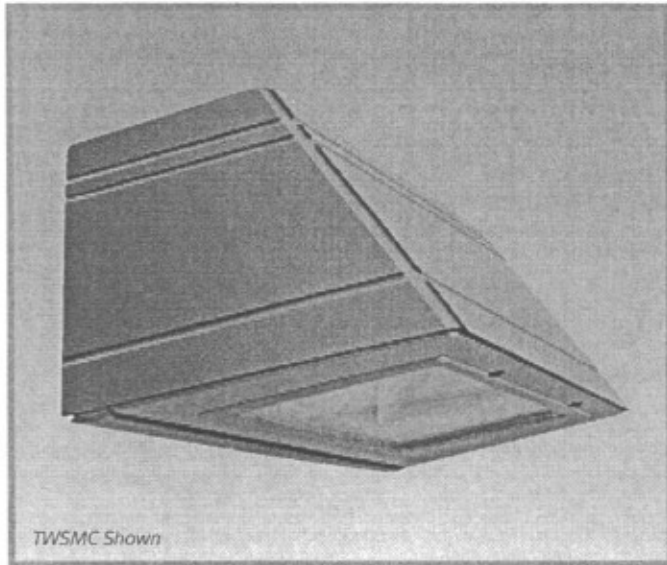

The TWS Series trapezoidal wall sconce offers unique styling and maximum versatility with two sizes, multiple light sources, and a variety of finishes. The downlight-only design features a maximum cutoff distribution with exceptional horizontal illumination.



Fixture Specifications

FEATURES

- Durable cast aluminum housing*
- Integrated design eliminates high angle brightness
- Luminaire finished in weatherproof powder-coat paint
- Completely sealed, flat tempered glass lens suitable for use in wet location
- Ships complete with lamp

ORDERING INFORMATION

SAMPLE CATALOG NUMBER

TWSX **XXXXXX** **WD** **XX** **XXX**
 Series Wattage/Source Distribution Finish Voltage

SERIES

TWSMC Trapezoidal Wall Sconce Medium (Cast)
TWSL Trapezoidal Wall Sconce Large

WATTAGE/SOURCE¹

TWSMC	
70PMH	70 watt pulse start metal halide
100PMH	100 watt pulse start metal halide
150PMH	150 watt pulse start metal halide
70HPS	70 watt high pressure sodium
100HPS	100 watt high pressure sodium
150HPS	150 watt high pressure sodium
26OF	26 watt quad tube fluorescent
32TRF	32 watt triple tube fluorescent
42TRF	42 watt triple tube fluorescent
30LED	30 watt LED ⁴

WATTAGE SOURCE¹

TWSL	
250MH	250 watt metal halide
400MH	400 watt metal halide
250HPS	250 watt high pressure sodium
400HPS	400 watt high pressure sodium
242TRF	(2) 42 watt triple tube fluorescent


DISTRIBUTION

WD	Wide distribution (standard)
FT	Forward throw (TWSMC only)

FINISH²

DB	Dark Bronze
BK	Black
WH	White
PS	Platinum Silver

DIMENSIONS

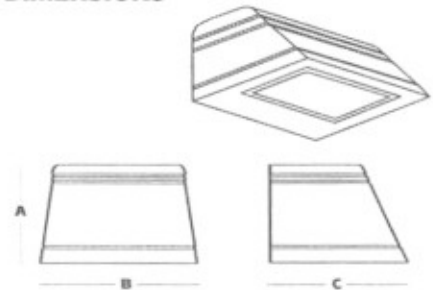

	A	B	C
TWSMC	7.0"	16.5"	9.25"
TWSL	9.45"	24.0"	13.75"

VOLTAGE

120	120 volt
277	277 volt
MT	Multi-Tap

OPTIONS

OSL	Quartz re-strike with lamp
PC	Button-type photocell (must specify voltage)
F	Single fusing
FF	Double fusing
EM12³	1 MR11/MR16 two pin socket for 12v power (by others) 35w max. 35w MR11 lamp included.
2EM12³	2 MR11/MR16 two pin sockets for 12v power (by others) 35w max. 35w MR11 lamp included.

ACCESSORIES

EM	Remote emergency ballast (fluorescent only)
-----------	---

¹ Consult factory for other lamp wattages and sources.
² Other finishes available. Consult factory.
³ TWSL housing formed aluminum only. Cast version to be substituted when available.
⁴ Available in 120 volt only.
⁵ Not available with LED source.




A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642

www.securitylighting.com

RADIUS WALL SCONCE

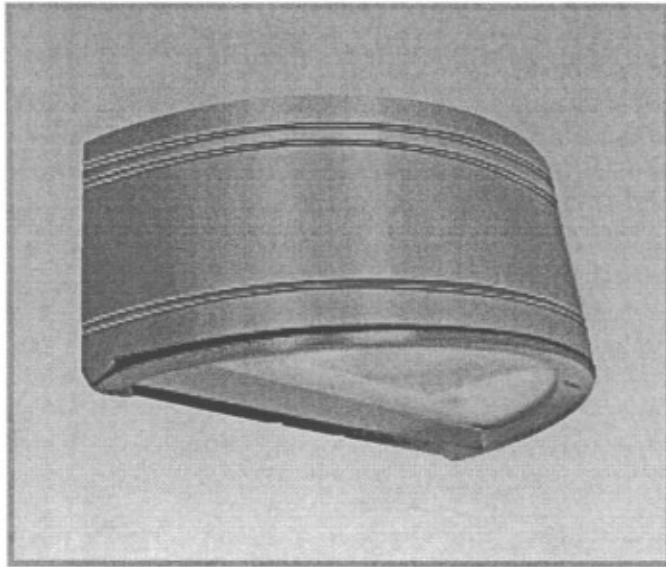

The RWSC Series radius wall sconce offers maximum versatility with multiple light sources and finishes. The available combination of uplight/downlight washes the building facade while the radial soft form housing will complement similar architectural design elements.



Fixture Specifications

FEATURES

- Durable cast aluminum housing
- Available in various lighting distributions for maximum versatility
- Integrated design eliminates high angle brightness
- Luminaire finished in weatherproof powder-coat paint
- Completely sealed, flat tempered glass lenses suitable for use in wet location
- Ships complete with lamp

ORDERING INFORMATION

SAMPLE CATALOG NUMBER

RWSC **XXXXXX** **XX** **XX** **XXX**
 Series Wattage/Source Distribution Finish Voltage

SERIES	
RWSC	Radius Wall Sconce


WATTAGE/SOURCE	
70PMH	70 watt pulse start metal halide
100PMH	100 watt pulse start metal halide
150PMH	150 watt pulse start metal halide
70HPS	70 watt high pressure sodium
100HPS	100 watt high pressure sodium
150HPS	150 watt high pressure sodium
26QF	26 watt quad tube fluorescent
32TRF	32 watt triple tube fluorescent
42QF	42 watt quad tube fluorescent
30LED	30 watt LED**

DISTRIBUTION	
UD	Up/Downlight
WD	Downlight only (wide distribution)- standard
FT	Downlight only (forward throw)

FINISH*	
DB	Dark Bronze
BK	Black
WH	White
PS	Platinum Silver

- 1 Consult factory for other lamp wattage and sources.
- 2 Other finishes available. Consult factory.
- 3 Available in 120 volt only.
- 4 Available with WD distribution only.
- 5 Not for use with LED sources.

DIMENSIONS

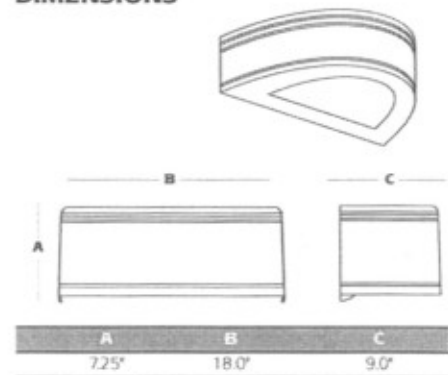

VOLTAGE	
120	120 volt
277	277 volt
MT	Multi-Tap

OPTIONS	
OSL	Quartz re-strike with lamp
F	Single fusing
FF	Double fusing
EM12	1 MR11/MR16 two pin socket for 12v power (by others) 35w max. 35w MR11 lamp included.
2EM12	2 MR11/MR16 two pin sockets for 12v power (by others) 35w max. 35w MR11 lamp included.

ACCESSORIES	
EM	Remote emergency ballast (fluorescent only)



A HUBBELL LIGHTING, INC. COMPANY

Performance Designed Lighting Products

1085 Johnson Drive • Buffalo Grove, IL 60089 • TOLL-FREE: 800-544-4848 • PHONE: 847-279-0627 • FAX: 847-279-0642

www.securitylighting.com